



- ✓ Touring
- ✓ Installation

2CH

1U



- ▶ Small-scale systems, portable and installed
- ▶ Stage monitors
- ▶ Hotels, restaurant and bars
- ▶ Amusement parks, themed entertainment
- ▶ Houses of worship, auditoriums
- ▶ Educational facilities
- ▶ Live and dance clubs
- ▶ Mobile DJ's

Equally versatile in both portable and installed system configurations, occupying only one single rack space and weighing just over 7 kg / 16 lb, the **MI4D** is a flexible, great sounding solution for compact sound systems.

Benefitting from core technologies of Powersoft's flagship K Series, the **MI4D** is highly efficient, leading to low power consumption, and consequently to substantial money savings on electricity, all in an eco-friendly way.

Minimum heat dissipation makes the **MI4D** suitable for hot or otherwise challenging environments.


Added the legendary sound quality thanks to Powersoft's unique, patented Class D output stage design, the **MI4D** represents a fantastic value, practically as well as commercially.

The **MI4D** comes with 4 years warranty and, like all Powersoft products, is entirely designed and made in Italy.

2-channel mode		mono-bridged mode
4 Ω / Ch	8 Ω / Ch	8 Ω / Ch pair
700 W	360 W	1,400 W

EIAJ Test Standard, 1 kHz, 1% THD

- ✓ **Legendary Powersoft efficiency:**
 - ▶ Compact and space saving: 1 RU at 358 mm / 14.1" standard depth
 - ▶ Green Audio Power®: minimal "carbon footprint" and operational cost of electricity
 - ▶ Plenty of power, little weight: up to 2,800 W in 7.3 kg / 16 lb
- ✓ **Unique Powersoft technology for efficient, reliable performance:**
 - ▶ Switch mode power supply, internally switchable 230/115 V nominal
 - ▶ Fixed frequency switch mode amplifier output stages
 - ▶ Patented amplifier output filters with ripple cancellation network
- ✓ Optimized for 4 Ω loads, thus ideally matching real-world scenarios in targeted applications
- ✓ Fully protected circuit design:
 - ▶ AC protection: shuts down power supply when AC mains voltage is outside operating range
 - ▶ Clip limiter: prevents severely clipped waveforms from reaching loudspeakers, while still maintaining full peak power output
 - ▶ DC protection: protects against infrasonic signal at the outputs
 - ▶ VHF protections: protects the loudspeakers against destructive non-audible, non-musical high frequency signals
 - ▶ Short circuit protection: protects the amplifier from short circuit or similar events on the outputs; with automatic protection reset
 - ▶ Thermal protection: mutes outputs once output devices reach 75 °C / 167 °F; automatic unmute once temperature is down to 65 °C / 149 °F
- ✓ Temperature controlled continuous variable speed fan, front to rear airflow
- ✓ Recessed stepped level attenuators
- ✓ Full four years warranty
- ✓ Also available as MI4D HDSP+ETH with integrated DSP and Ethernet comm port

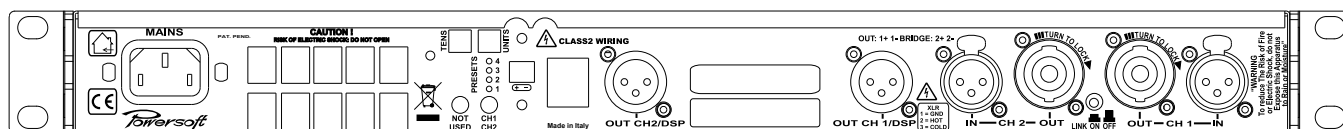

Specifications

General	Number of channels	2			
	Output power	2-channel mode			mono-bridged mode
	EIAJ Test Standard, 1 kHz, 1% THD	4 Ω / Ch	8 Ω / Ch		8 Ω / Ch pair
		700 W	360 W		1,400 W
	Max output voltage / current	85 V _{peak} / 65 A _{peak}			
AC Mains Power	Power supply	Universal, regulated switch mode			
	Operating voltage / Inrush current	115 V / 230 V (factory selection) ± 15%, 50 Hz - 60 Hz / < 26 A _{RMS}			
	Consumption / current draw	@ 230 V		@ 115 V	
	Idle	39 W	0.3 A	39 W	0.6 A
	1/8 of max output power @ 4 Ω	283 W	1.9 A	283 W	3.8 A
	1/4 of max output power @ 4 Ω	538 W	3.5 A	538 W	7 A
Thermal	Environmental operating temperature	0° - 45° C / 32° - 113° F			
	Thermal dissipation	Fan, continuously variable speed, temperature controlled, front to rear airflow			
	Idle	133 BTU/h		33 kcal/h	
	1/8 of max output power @ 4 Ω	368 BTU/h		93 kcal/h	
	1/4 of max output power @ 4 Ω	641 BTU/h		162 kcal/h	
Audio	Gain	32 dB, 30 dB, 28 dB, 26 dB, 24 dB, 22 dB, 20 dB, 18 dB, 14 dB, 4 dB, -∞, user selectable			
	Frequency response	10 Hz - 30 kHz (1 W @ 8 Ω, ± 3 dB)			
	S/N ratio (amplifier section)	>113 dBA (20 Hz - 20 kHz, A weighted)			
	Crosstalk separation	>70 dB @ 1 kHz			
	Input sensitivity @ 8 Ω	1.4 V / 5.14 dBu			
	Max input level	6 V / 17.7 dBu			
	Input impedance	10 kΩ			
	THD+N / SMPTE IMD	≤ 0.05% @ 1/2 of full power			
	DIM100 IMD	typ. <0.005% (<0.02% @ >0.1 W)			
	Slew rate	40 V/μs @ 8 Ω, input filter bypassed			
Damping factor @ 8 Ω	>5000 @ 100 Hz				
DSP (optional)	A/D converter	CS5381, 2 channels, 24 bit / 48 kHz, 120 dB SNR			
	D/A converter	CS4398, 2 channels, 24 bit / 48 kHz, 120 dB SNR			
	Frequency response @ -3 dB	7 Hz - 22 kHz			
	THD	< 0.01% (20 Hz - 20 kHz)			
	Presets	Bank of 4 presets, management and upload via Armonía Pro Audio Suite™			
	Delay for time alignment	10 ms per output			
	Crossover filters	Butterworth, Linkwitz-Riley, Bessel, 6 dB/oct to 48 dB/oct			
	Output equalizer	up to 12 biquad fully parametric per channel: peaking, hi/lo shelving, hi/lo pass, band pass, band stop.			
	Input equalizer	up to 5 biquad filters (PEQ, shelving, band pass, band stop, all pass)			
	Limiters	Peak limiter, RMS limiter, frequency dependent RMS limiter			
	Damping control	< 120 Hz, range ± 2 Ω			
	System Delay	up to 170 ms for 2 IN/2 OUT or 340 ms for 1 IN/2 OUT			
	Front Panel	Indicators	4 LEDs per channel: 3 x green, 1 x red 2 status LEDs: 1 x green, 1 x yellow		
Controls		1 stepped level attenuator pot per channel; mains switch			
Maintenance		Dust filter foam behind front panel			
Rear Panel	Audio signal input connectors	2 x balanced Neutrik® XLR female			
	Loudspeaker output connectors	2 x Neutrik® Speakon NL4MD, 2 x Neutrik® XLR male hard-wired to the corresponding input			
	Network data port Ethernet	1 x RJ45 with activity LED with 2 rotary address switches			
	DSP preset selection	1 x Pushbutton (stepping through bank of 4 presets) 1 x 4 LED preset indicators			
	Aux voltage	1 x 2-pin Phoenix type MC 1.5/2-ST-3.81			
	AC mains	IEC C13 16 A connector; AC mains cord with 3-pin plug 15 A for US, IEC Schuko 16 A for every other nation			
	Controls	1 x link switch, linking analog inputs 1 & 2			
Construction	Dimensions	W 483 mm / 19", H 44.5 mm / 1 RU, D 358 mm / 14.1"			
	Chassis	1 mm (0.04") steel chassis and steel removable dust cover, 3 mm (0.12") steel front panel, screw hole protection, steel side reinforcement & rear support			
	Weight	7.3 kg / 16 lb			

1) External high-pass filter required.

Data is subject to change without notice.
© 2012 Powersoft • All rights reserved.